



Heater Installation



Switch Installation

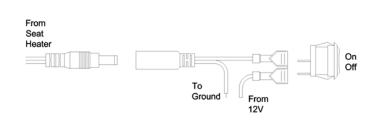

Warranty & Damage

This Heat Demon product has a five year limited warranty. The warranty does not cover:

- Products worn by use;
- Tampering or misuse of the product, including operation outside of design specifications;
- Damages made to products installed incorrectly, including shorting or pinched wires;
- Damages caused by crashes or natural disasters.

Because Heat Demon does not have any control over the connection and use of the product, or any other related electronics, no liability will be assumed nor accepted for damage resulting from the use of the product. In no case shall liability exceed the product's original cost.

Instructions for Seat Heater Kit with On/Off Switch

Part Numbers: 211030

Items Required for Installation

• Drill with a 13/16" Bit

Need help? Contact us at (763) 231-4769 or sales@symtec-inc.com, or visit YouTube.com/HeatDemon for instructional videos.

Warning: This product is not for use with seats with covers bonded to the foam. The product is designed to be installed beneath a vinyl or leather seat cover. For specification questions, please contact the seat manufacturer directly.

- 1. Remove the seat from the machine.
- 2. Remove the staples from the back of the seat, so the vinyl or leather can be rolled back.
- 3. Choose the placement of the seat heater. Route the seat heater power wire to the bottom of the seat.

Note: Removing foam and drilling a hole through the bottom of the seat may make installation easier.

- 4. Remove the paper backing from the heater and place in position. Make sure to press down on the heater to insure a good adhesion between the seat and the seat heater. Avoid creating any wrinkles.
- 5. Remove the paper backing from the foam and place over the heater. Make sure the foam covers the heater completely.
- 6. Pull the seat cover back over the seat heater and re-staple the cover.
- 1. Disconnect the battery leads.
- 2. Drill a 13/16" hole in the chosen location for the on/off switch.
- 3. Connect wires as shown in the figure.
- 4. Clip the high/low switch into the hole.

Note: Placing the high/low switch in a vertical orientation is preferred, in order for water to properly drain from inside the high/low switch.







Steering Wheel

SYMTEC

Seat Heaters

Grip Heaters

Visit www.HeatDemon.com for more Heat Demon products.